

1092290" 9T988860

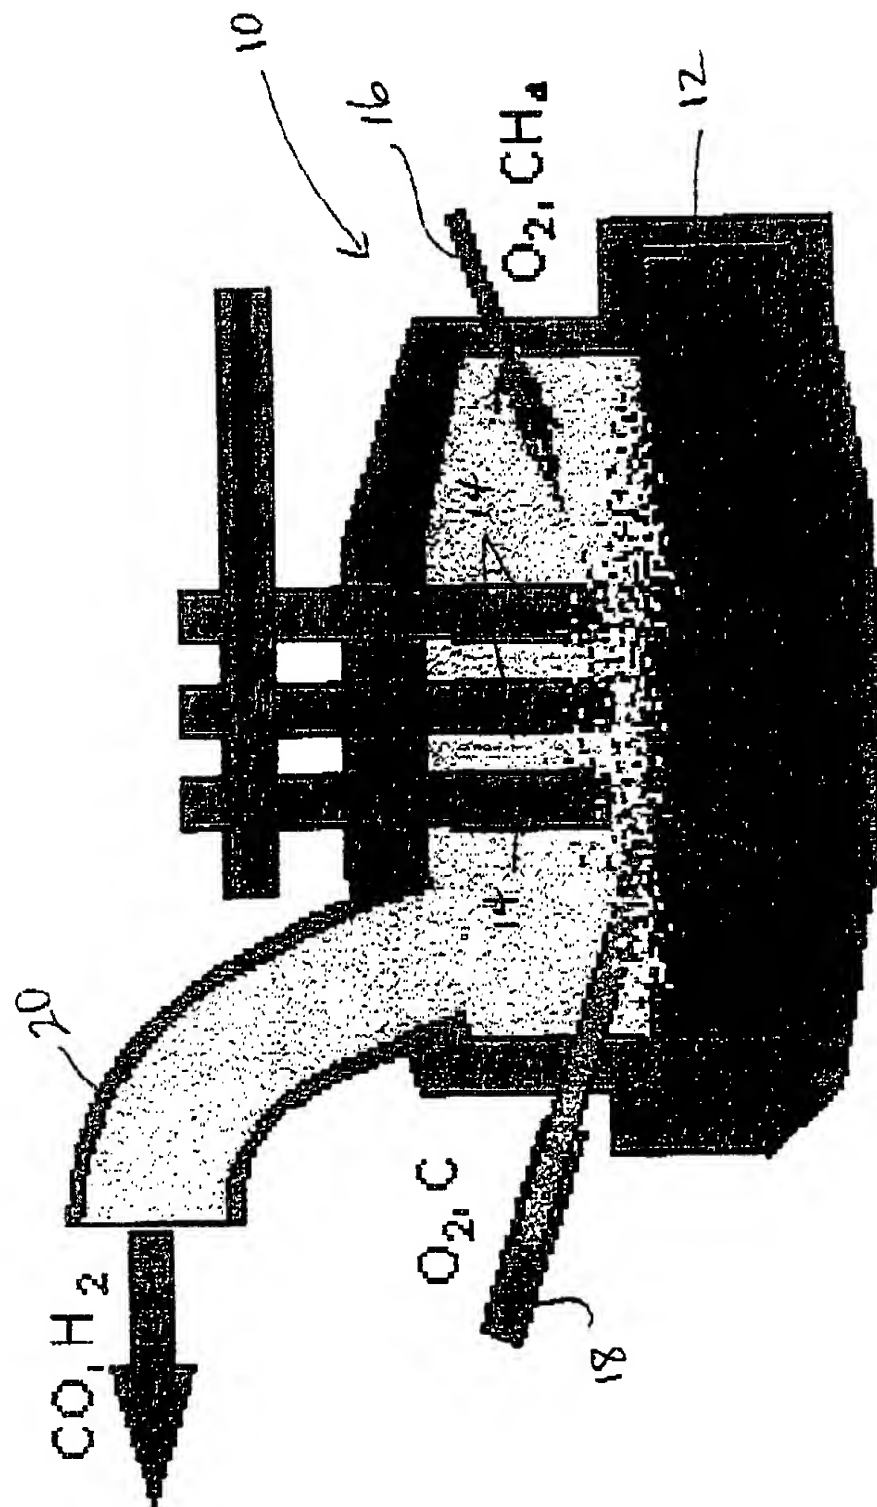


FIGURE 1

T09290" 9T988860

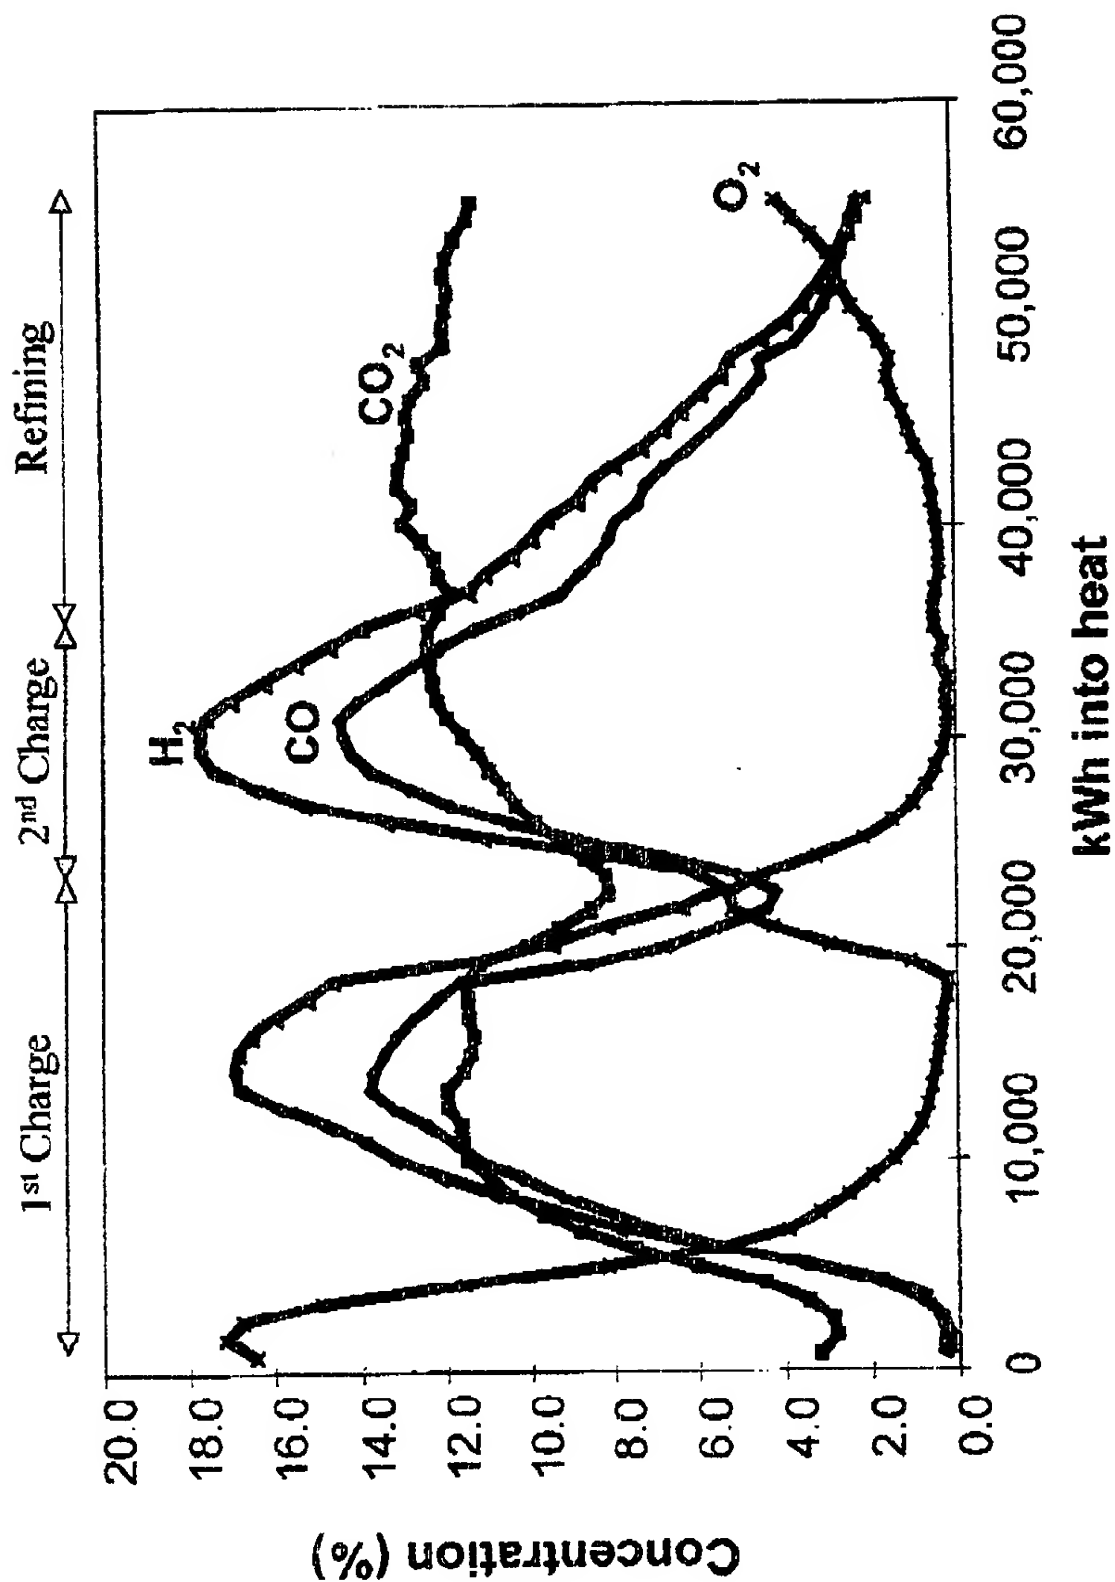


FIGURE 2


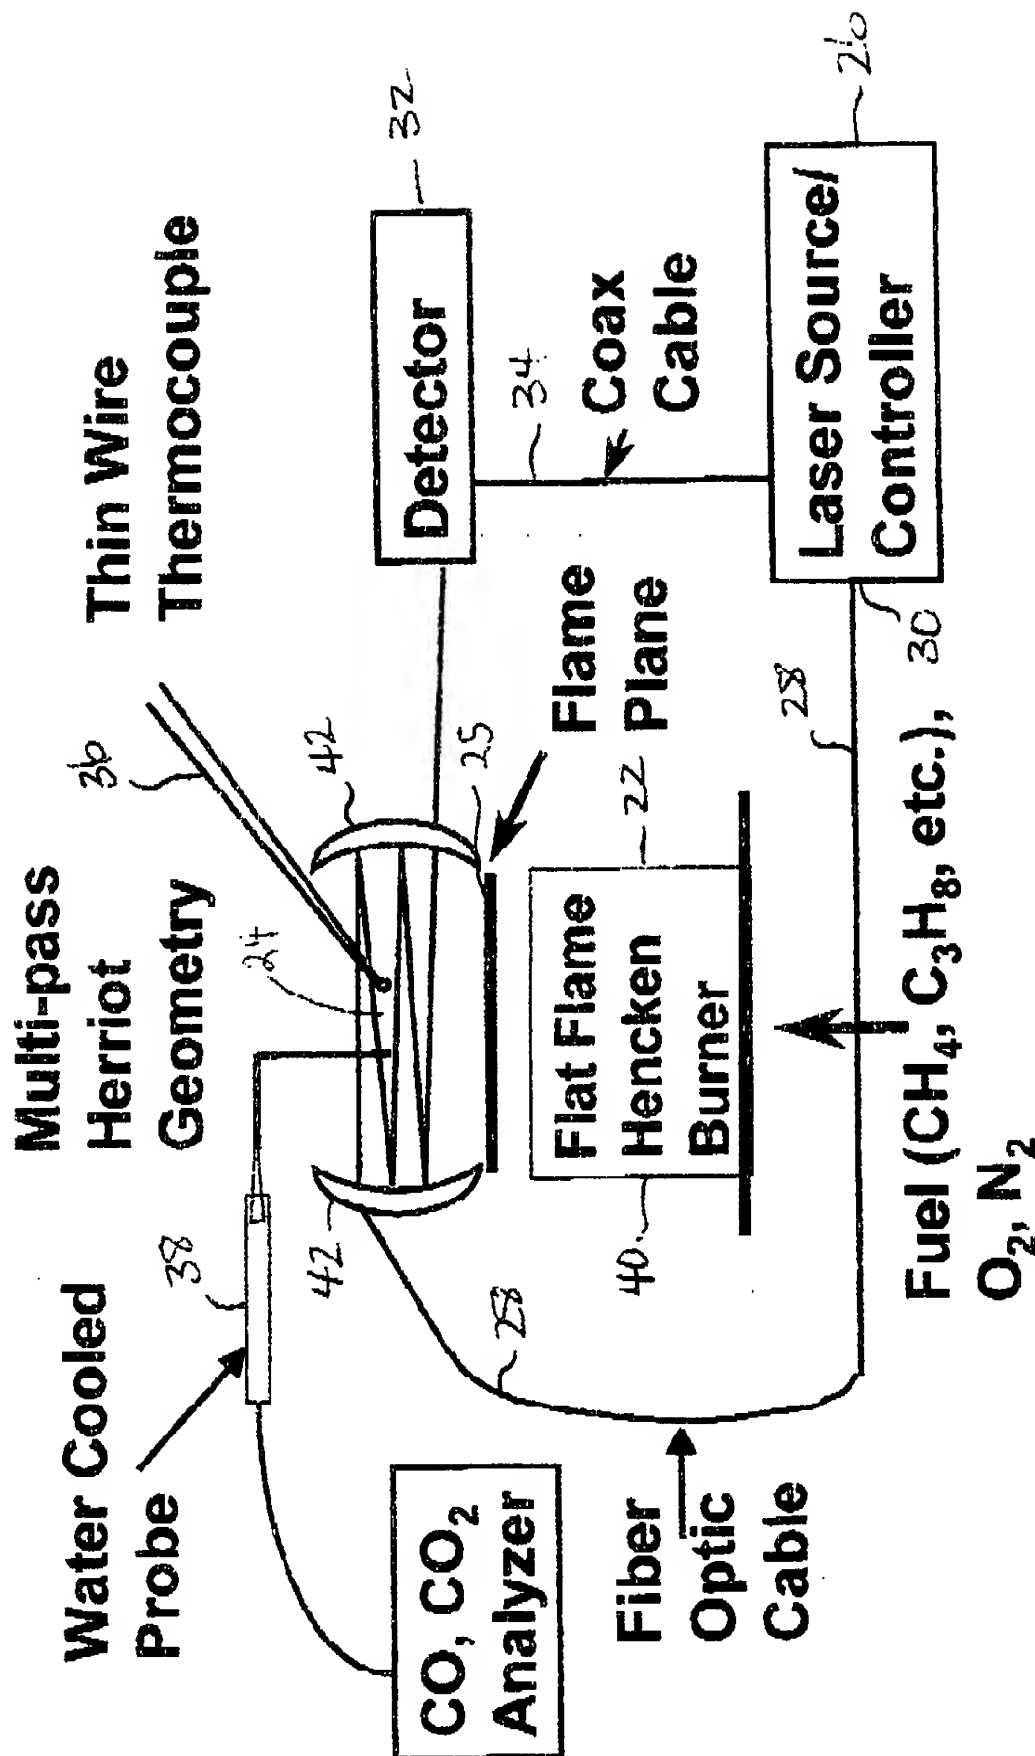


FIGURE 3

TO9290" 9T9B8860

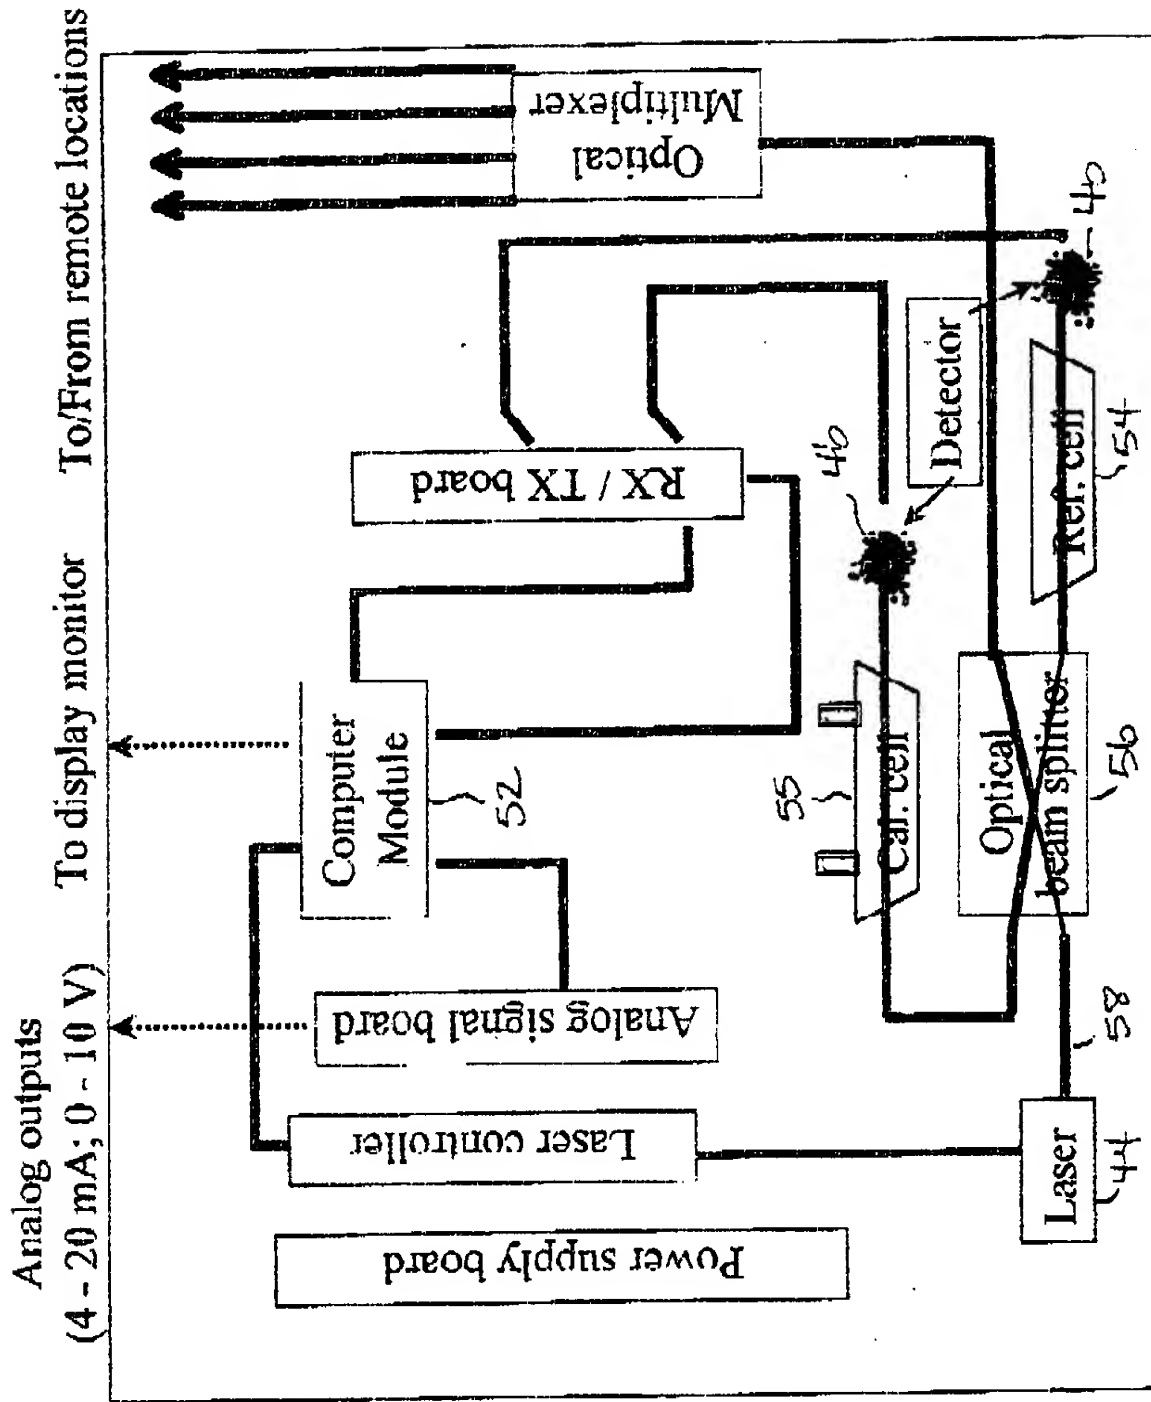

T09290" 9T988860

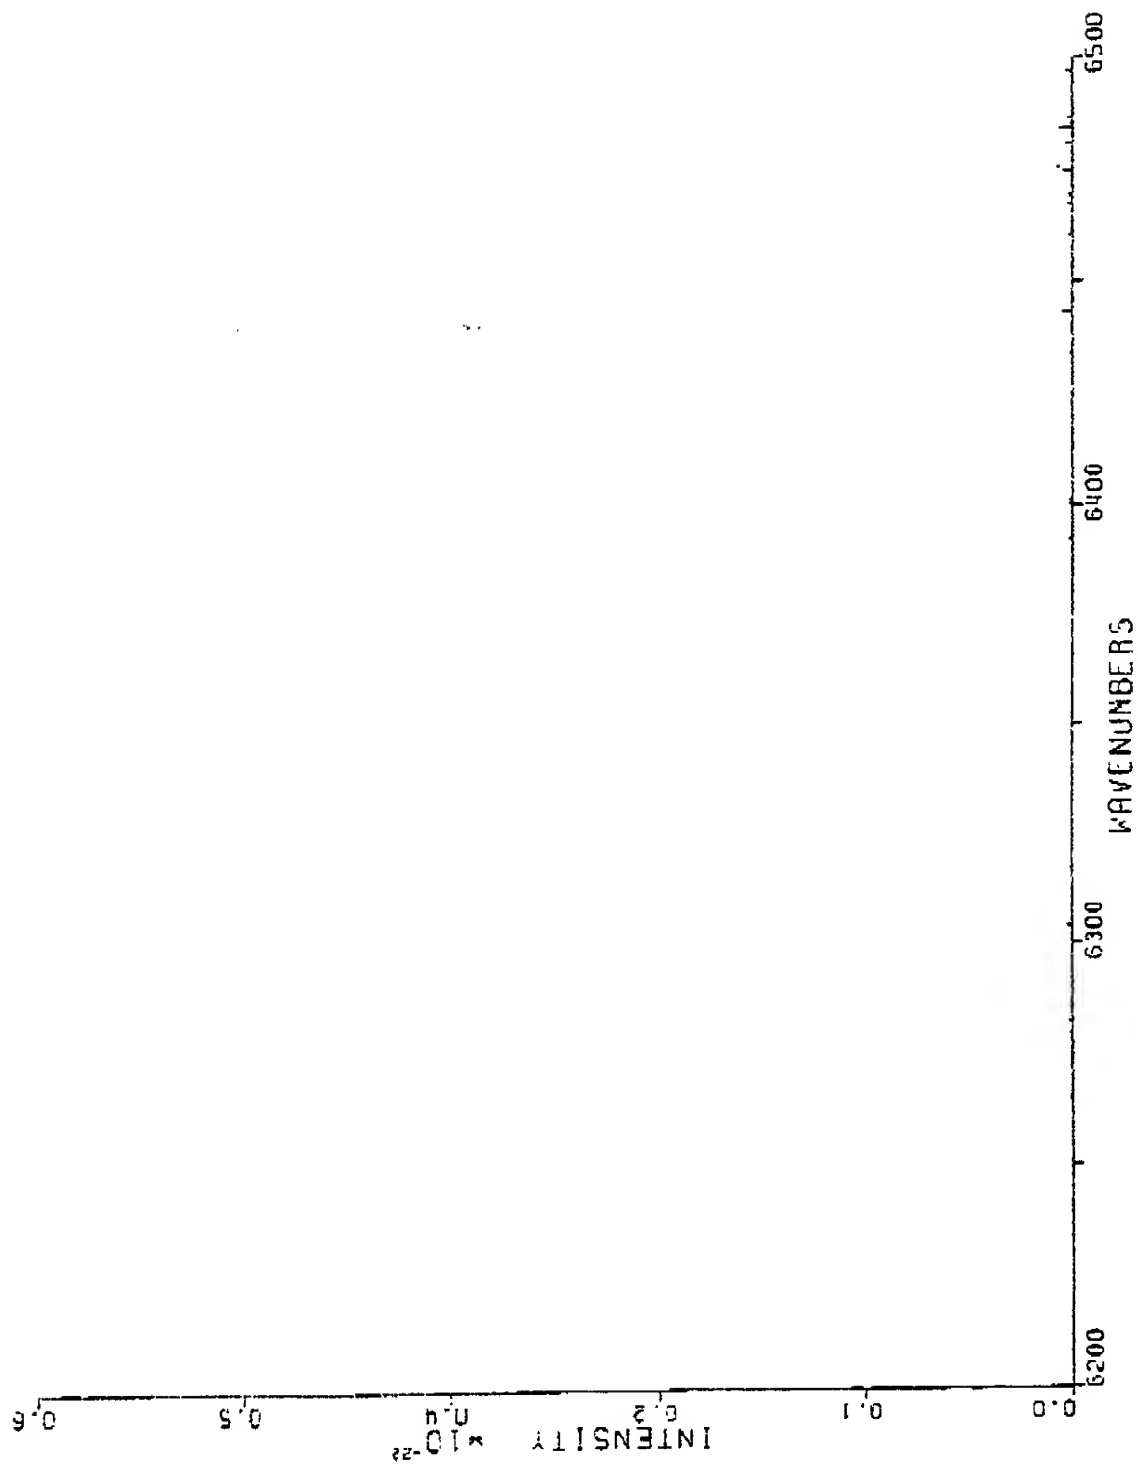


FIGURE 5

109290" 9T988860

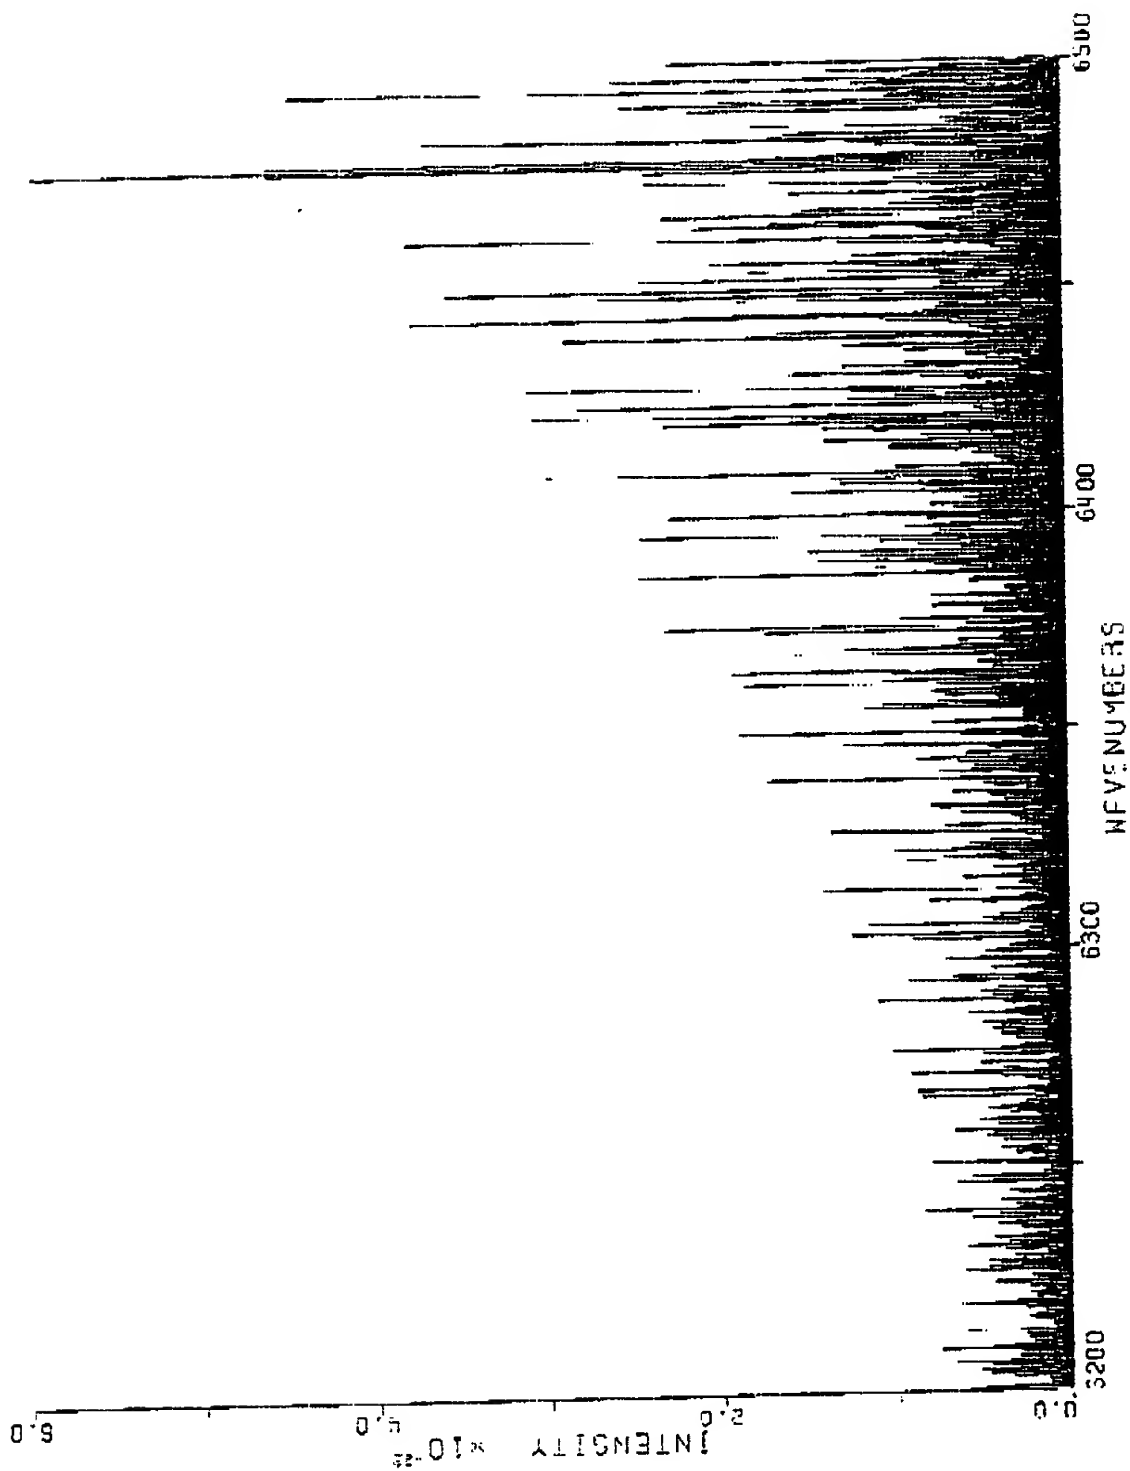


FIGURE 6

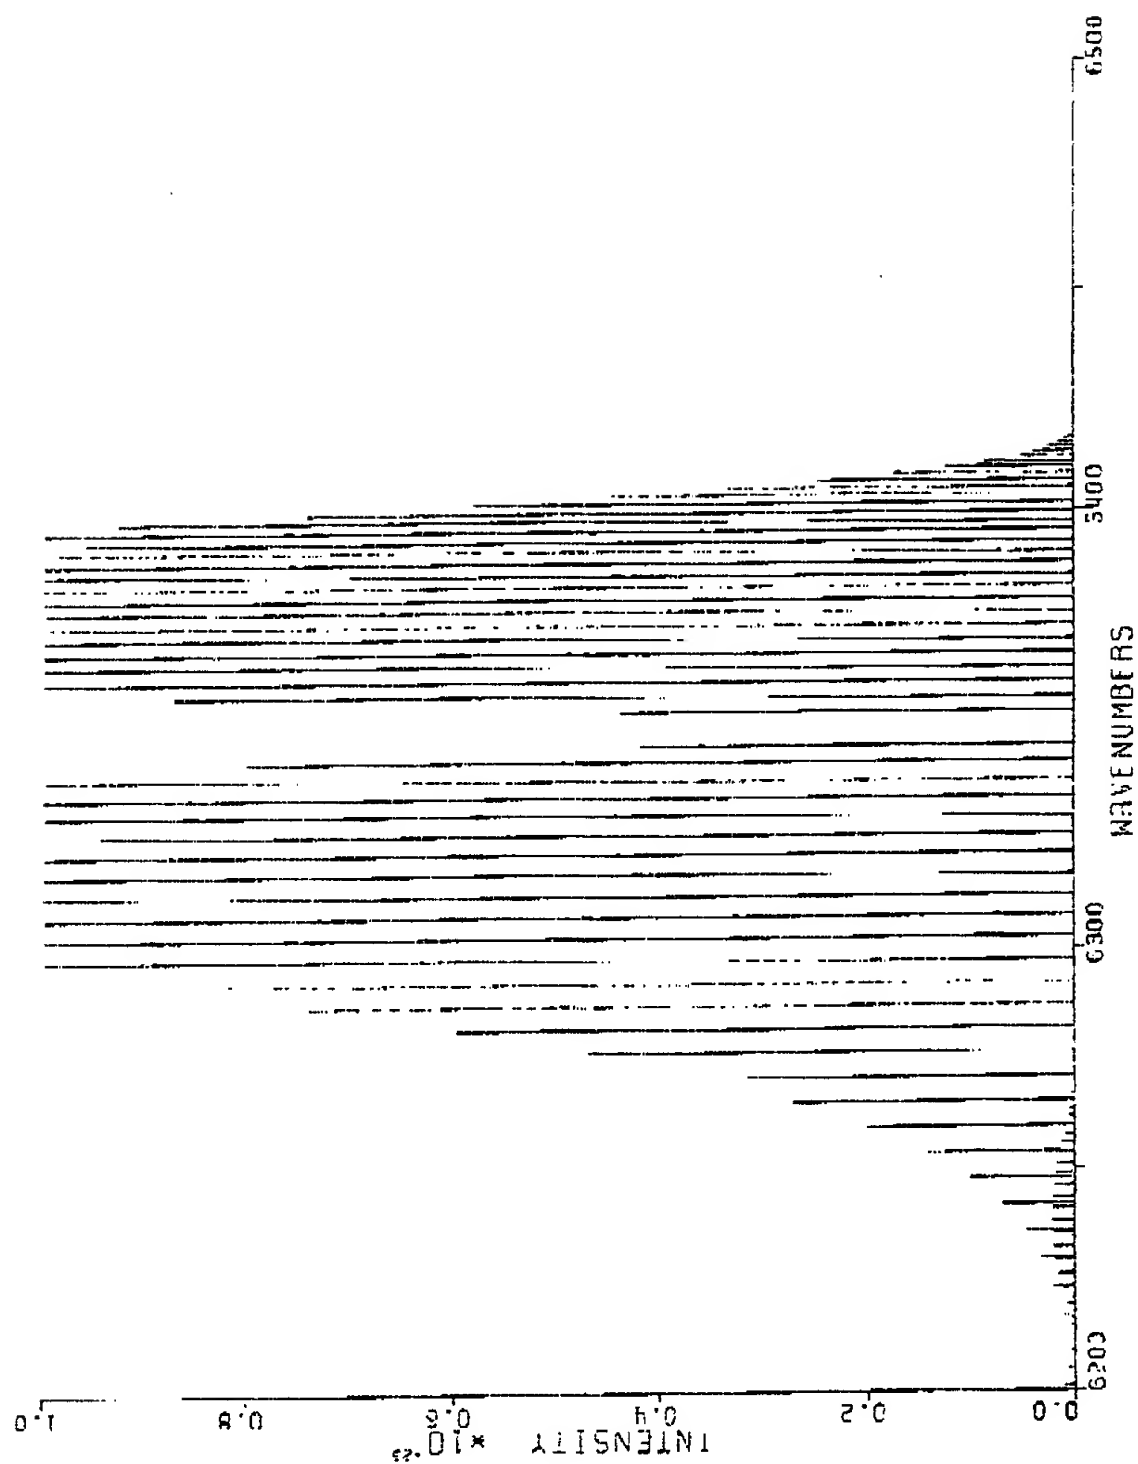


FIGURE 7

09888615-062601

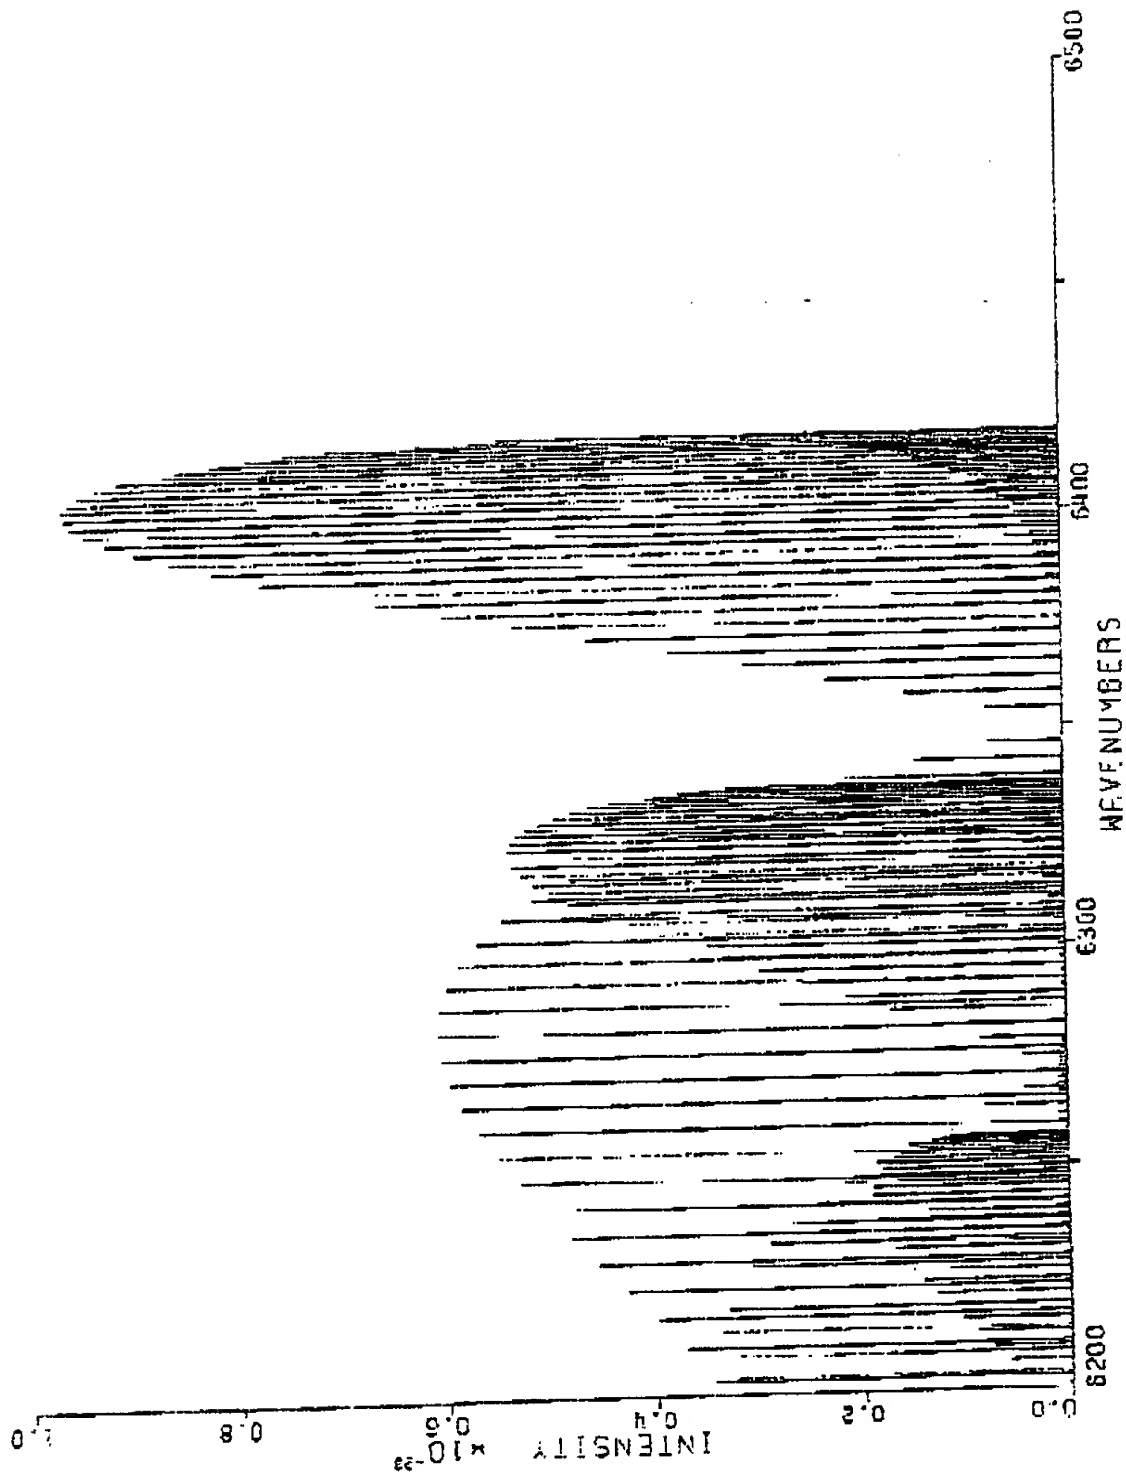


FIGURE 8

T09290" 9T988860

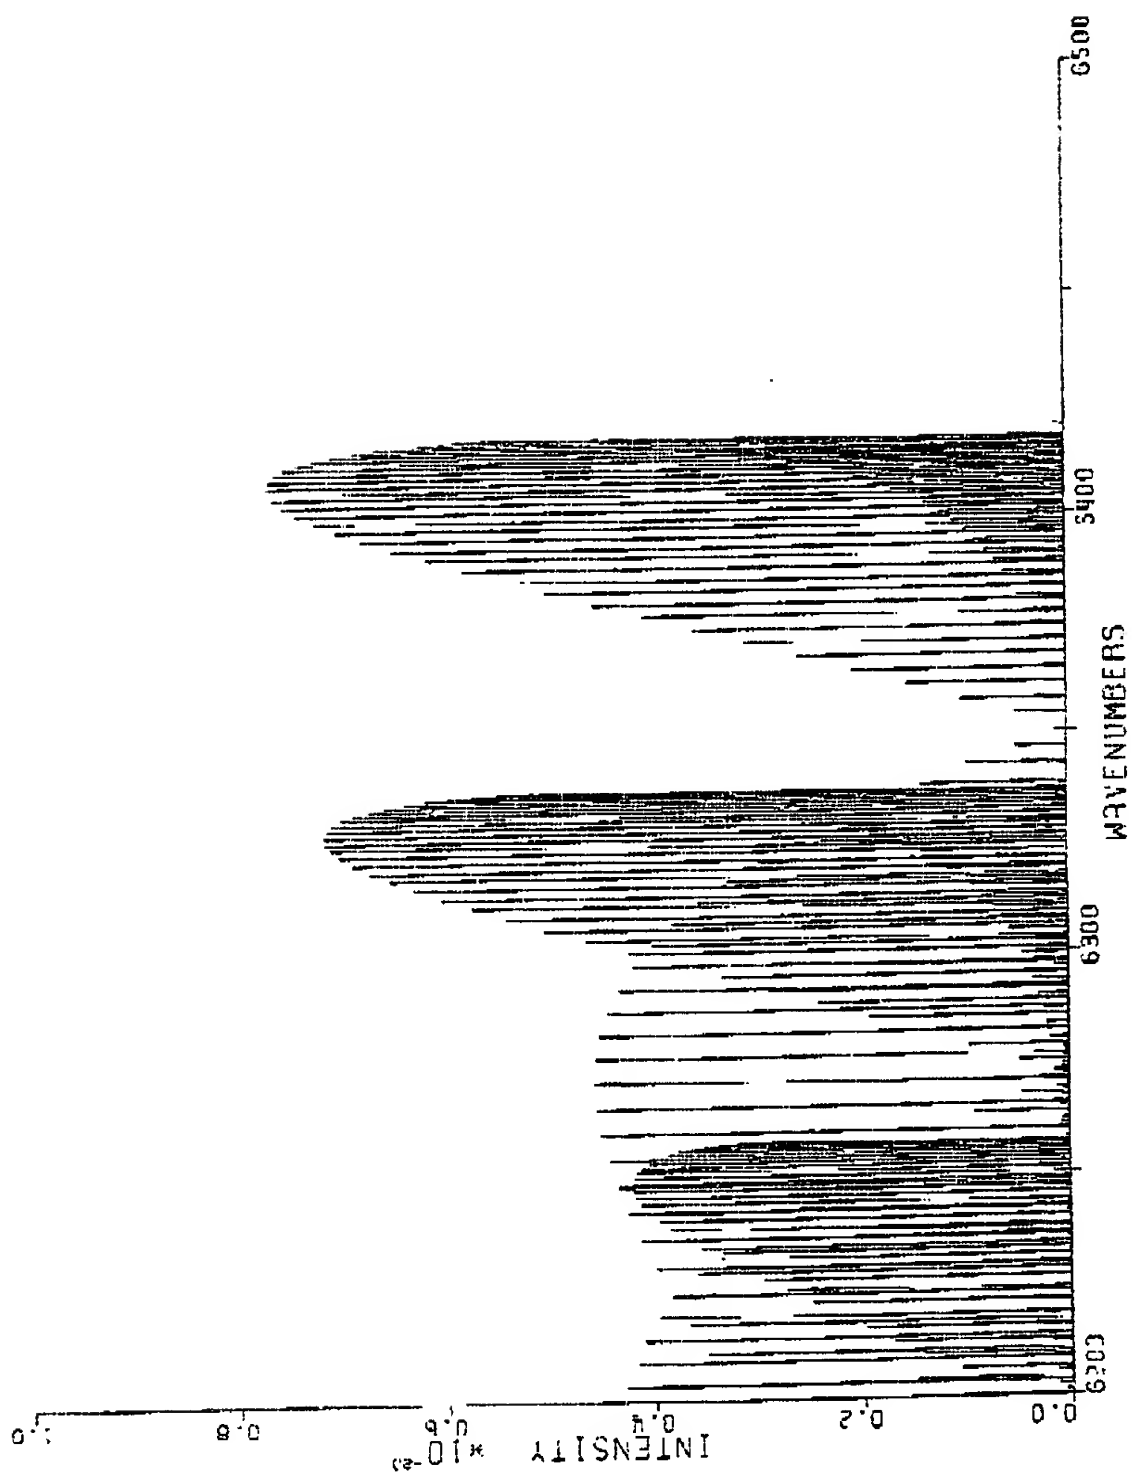


FIGURE 9

109250" 9T988860

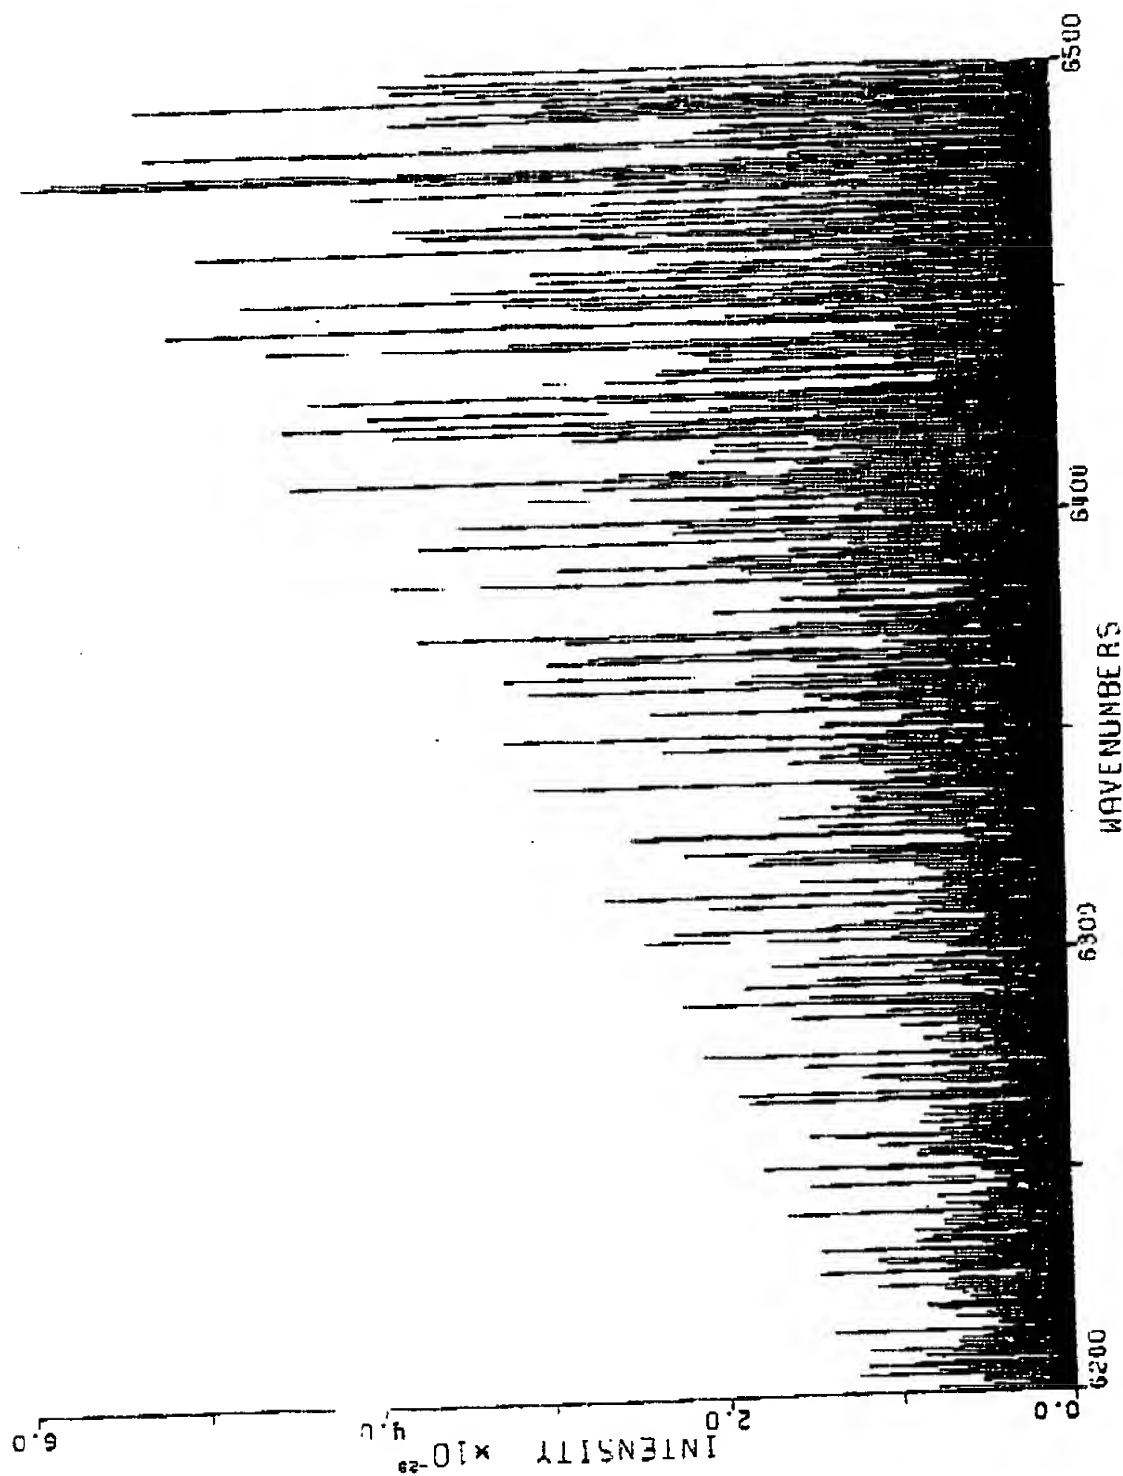


FIGURE 10

T09290" 9T988860

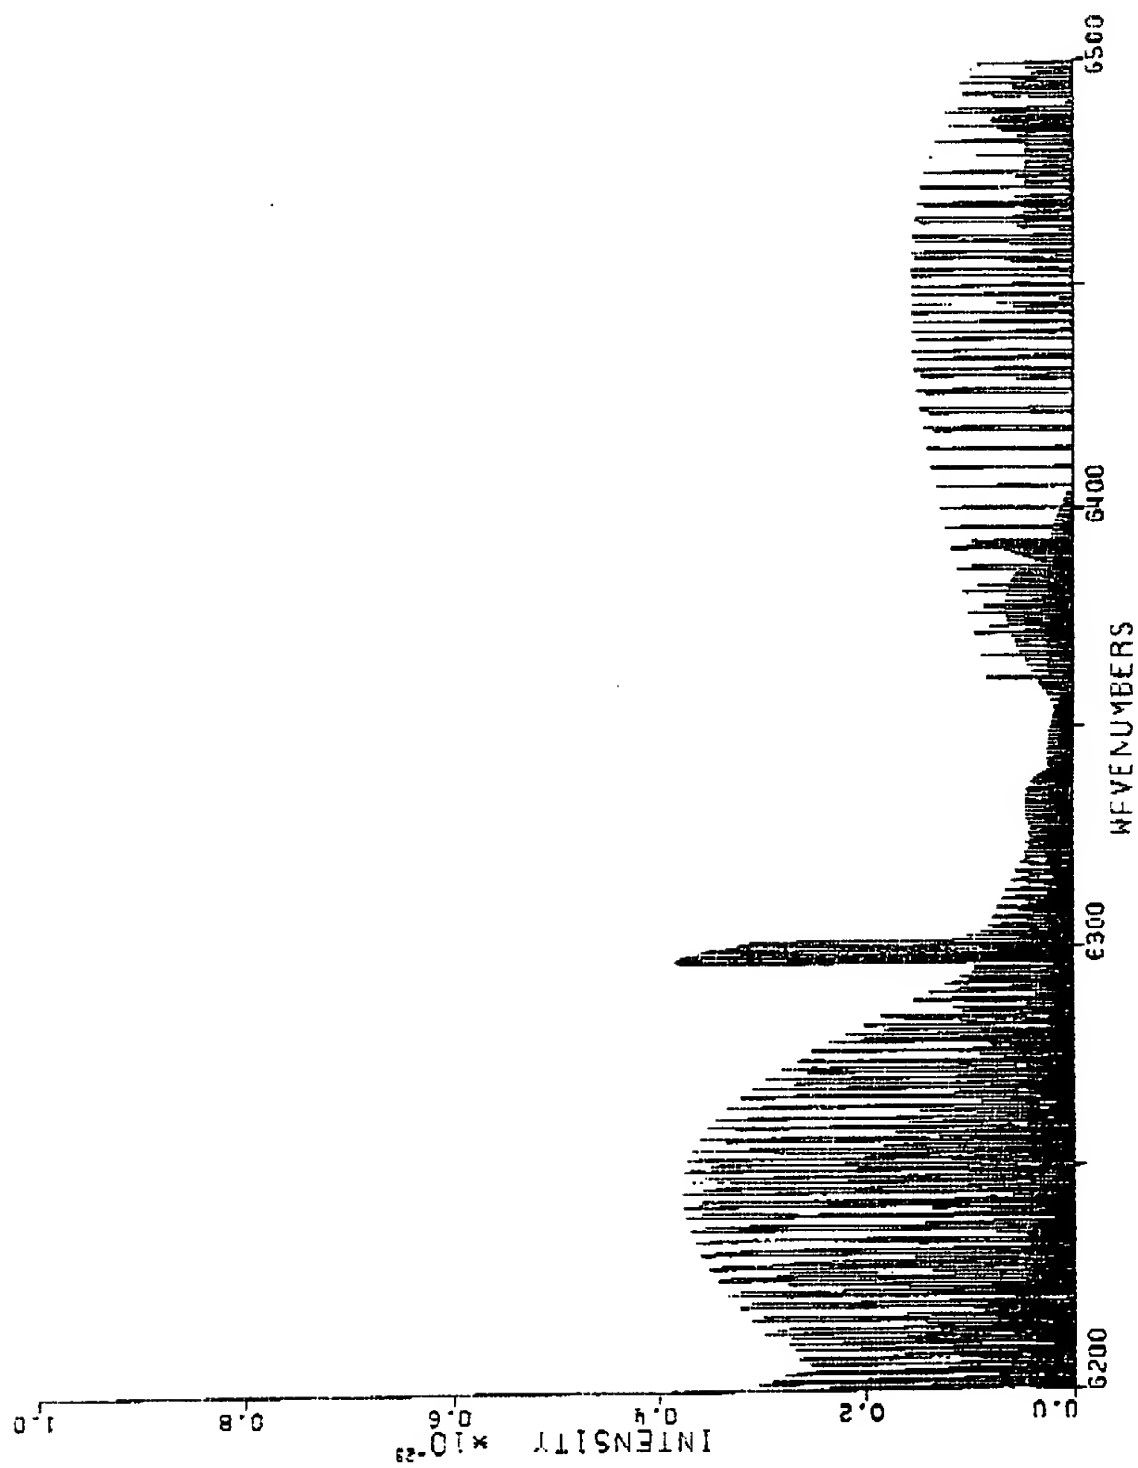


FIGURE 11

High Temperature (T_{beam} of about 1600K) WITH Power Correction

Signal Strength vs. Current for CH_4
CO Target Peak #1b Response: 3/2/00
Diode Temperature = 5°C; RF = -2.15 & Ramp = 4

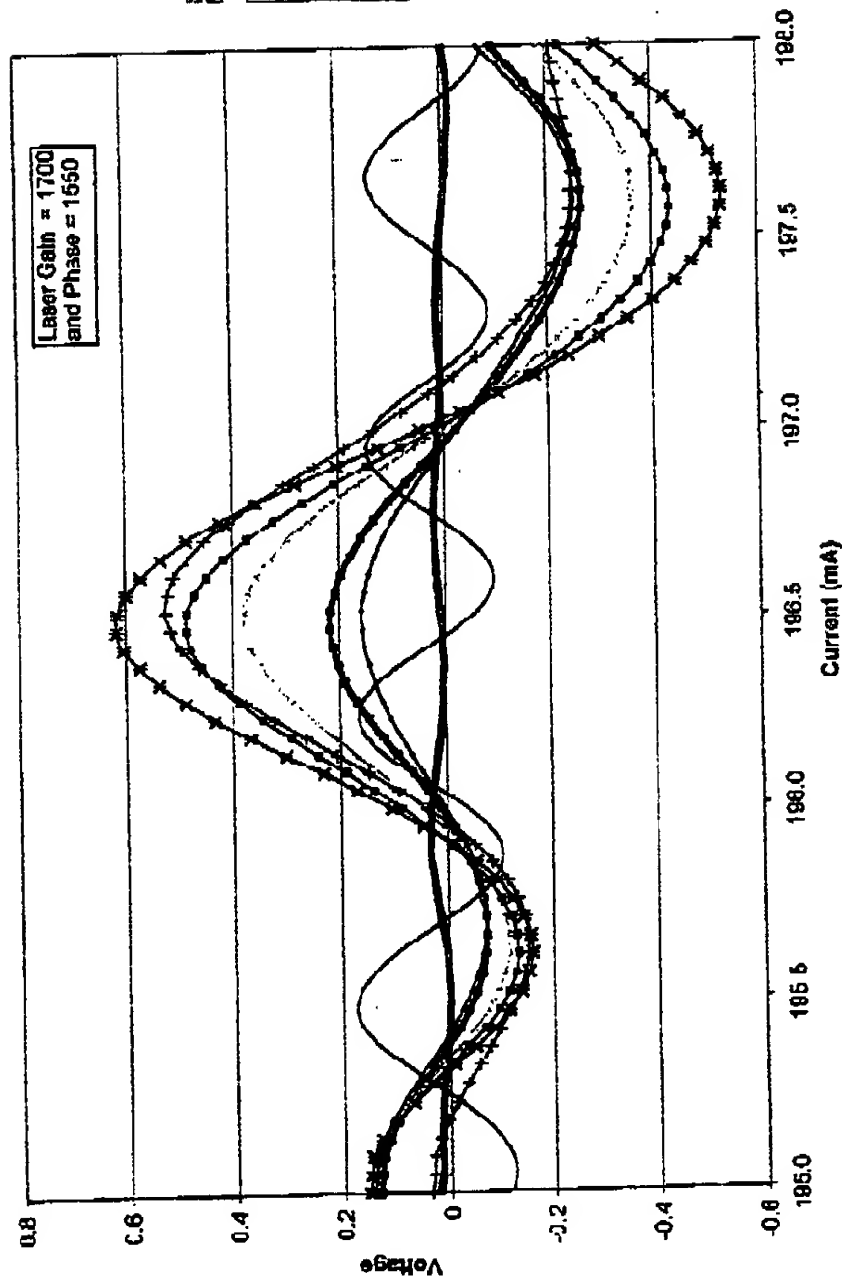


FIGURE 12

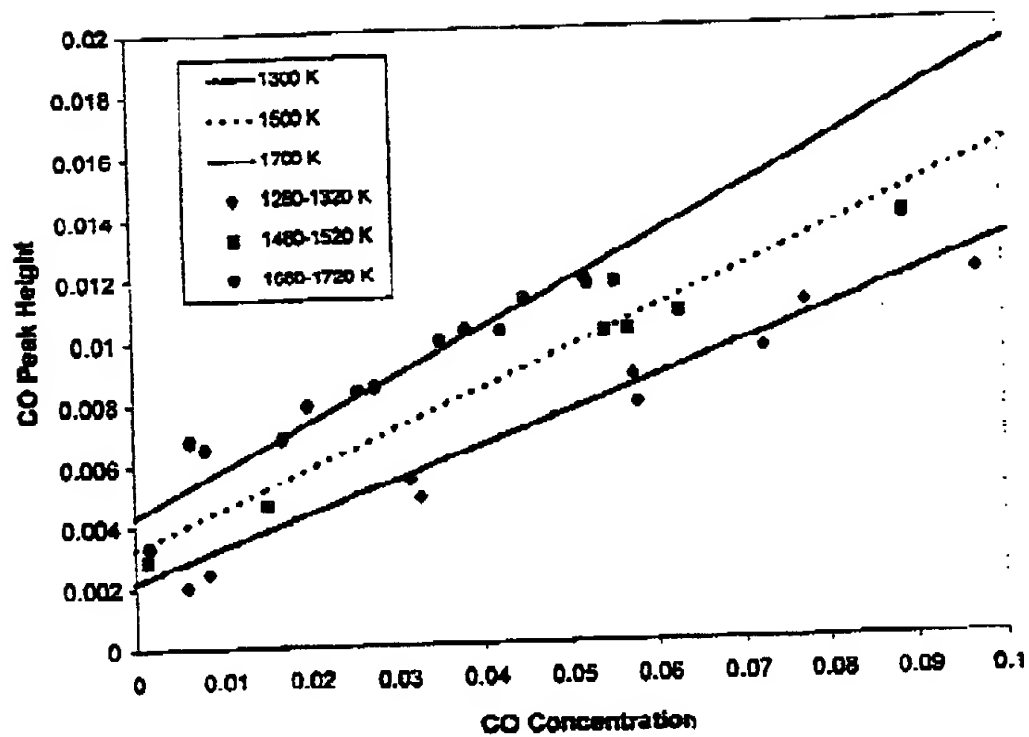


FIGURE 13

T09290-9T988860

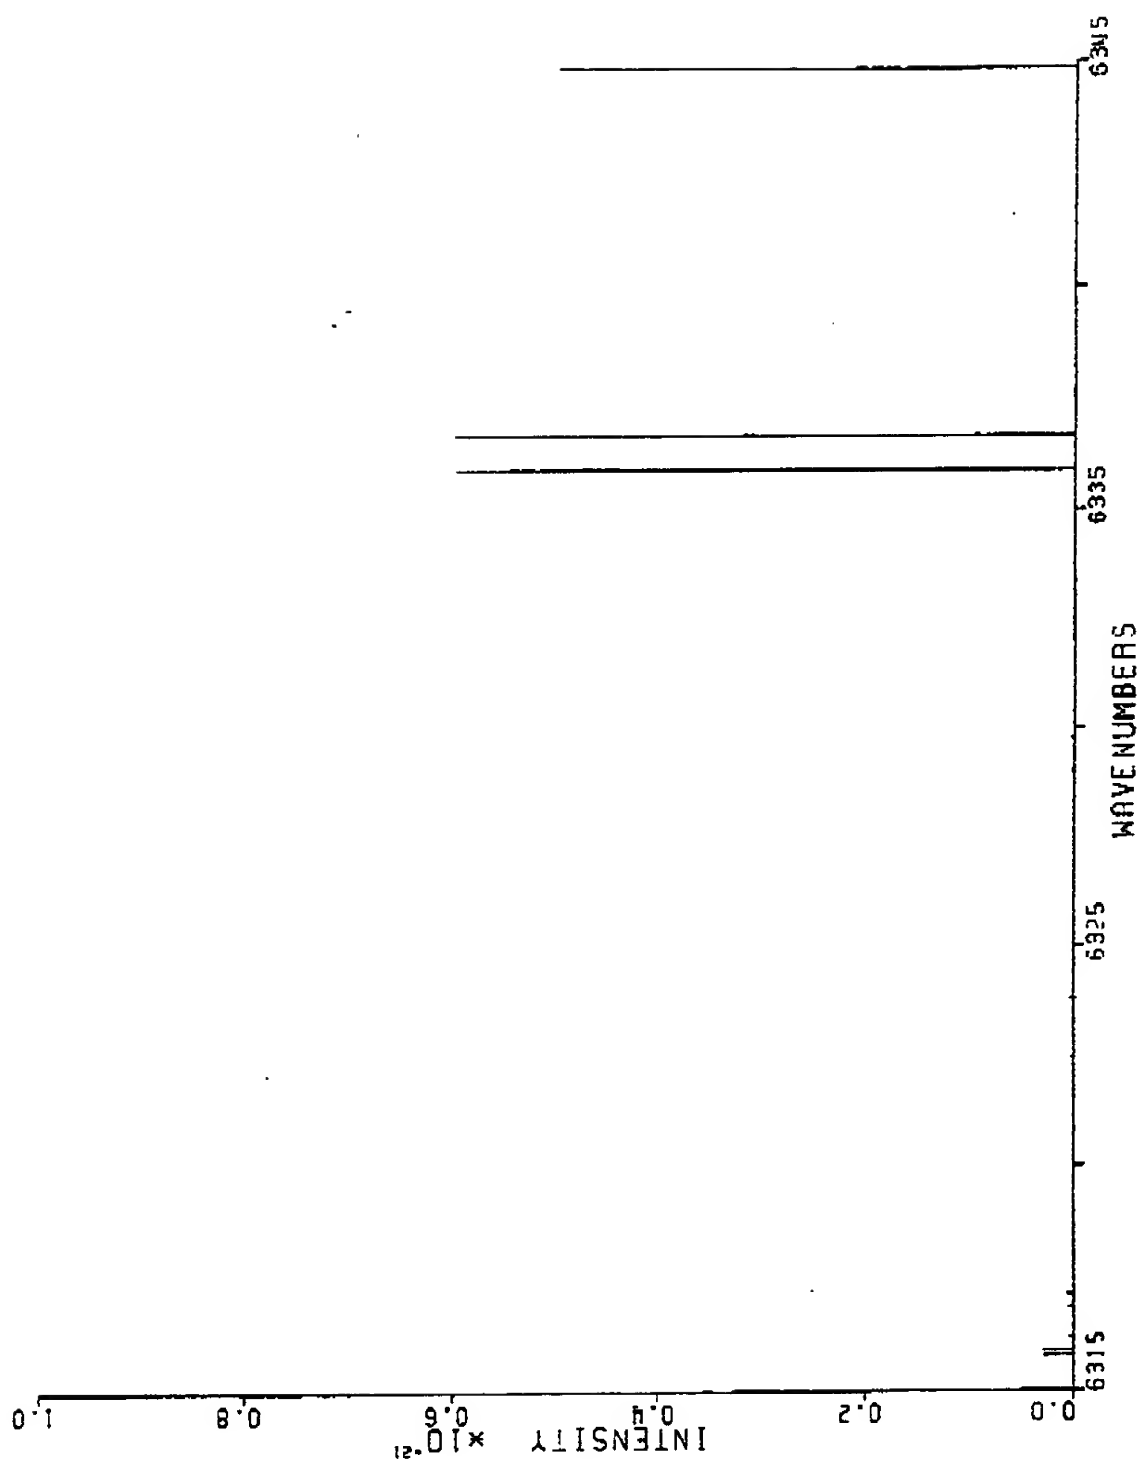


FIGURE 14

FIGURE 15

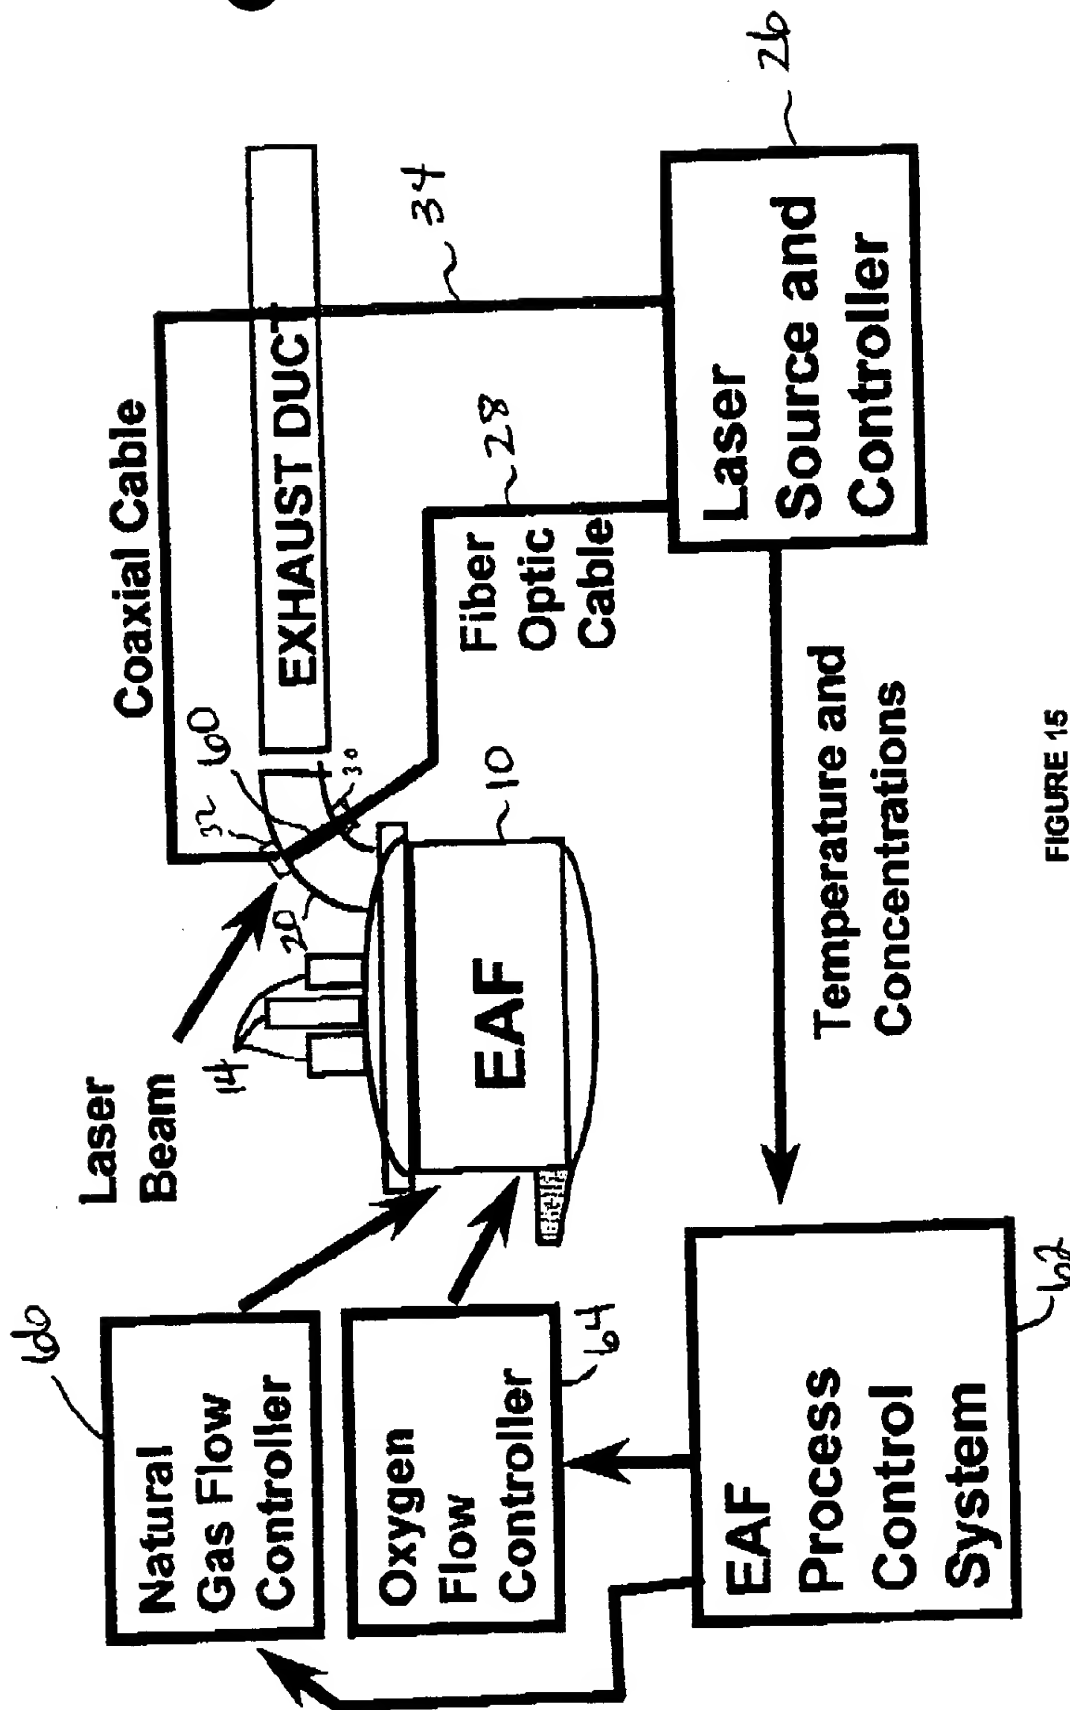


FIGURE 15

T09290" 9T988860

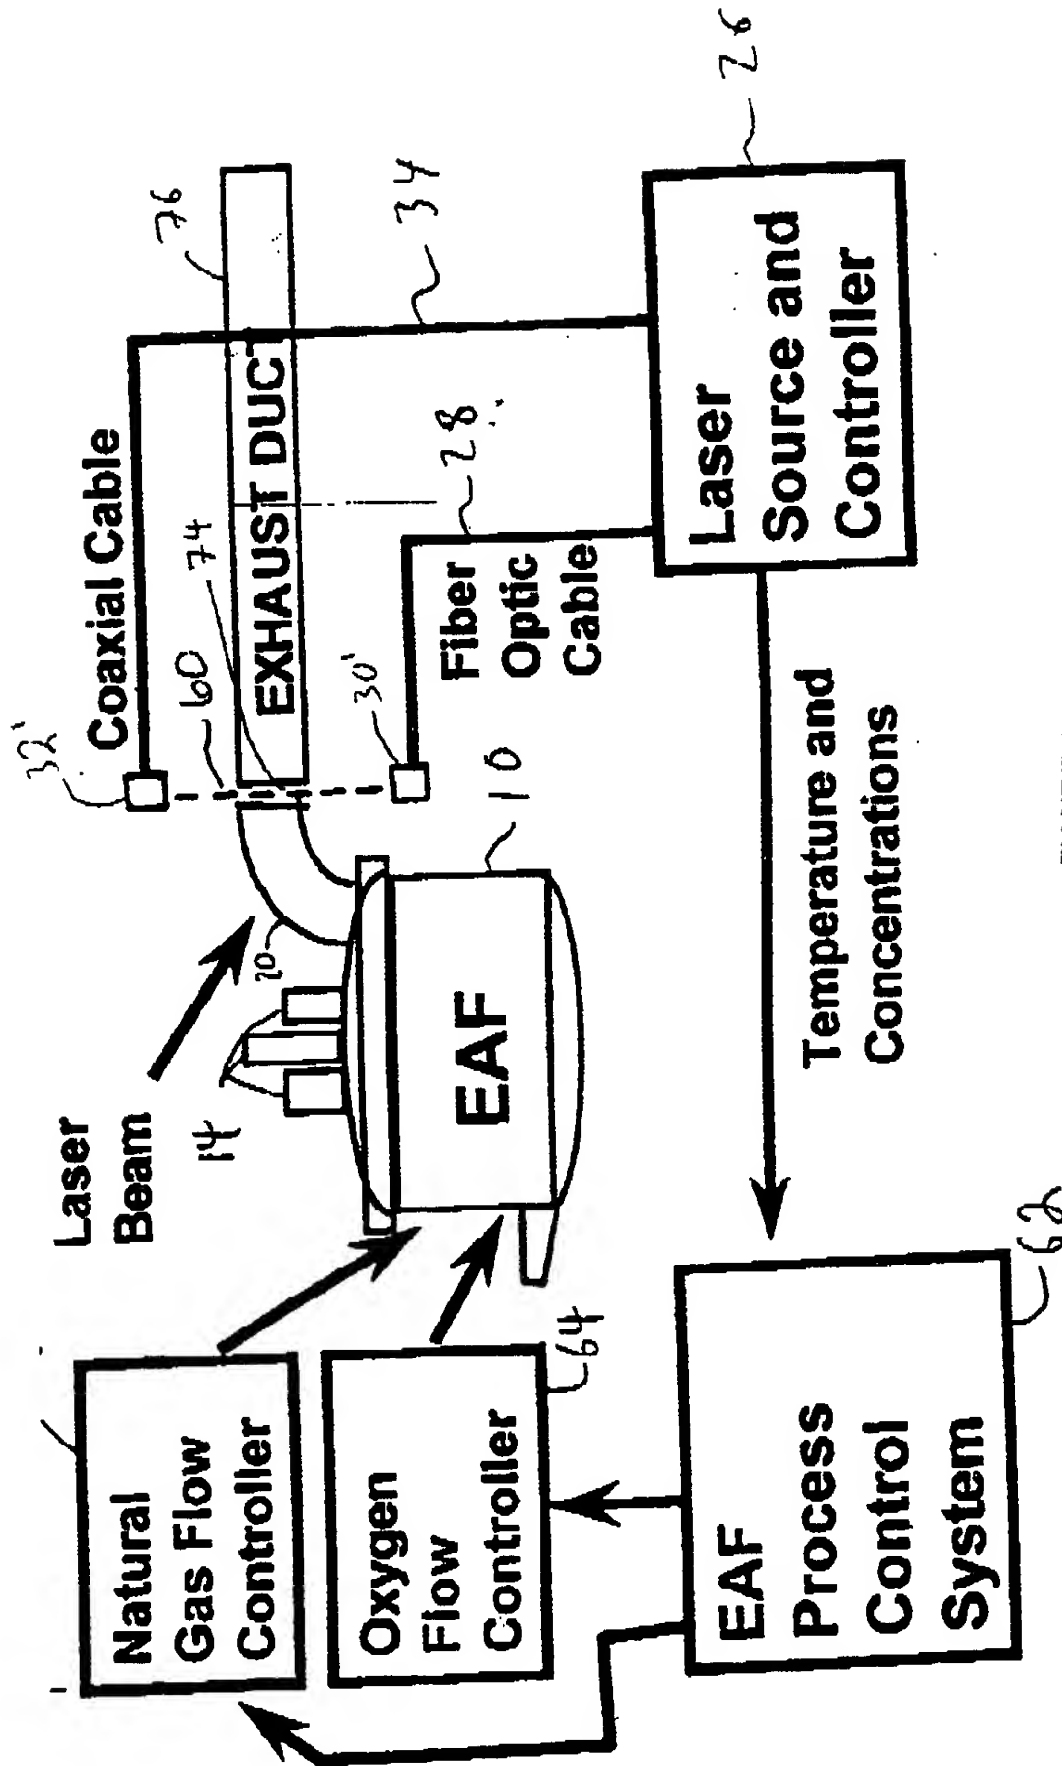


FIGURE 15a

FO9290" 9T988860

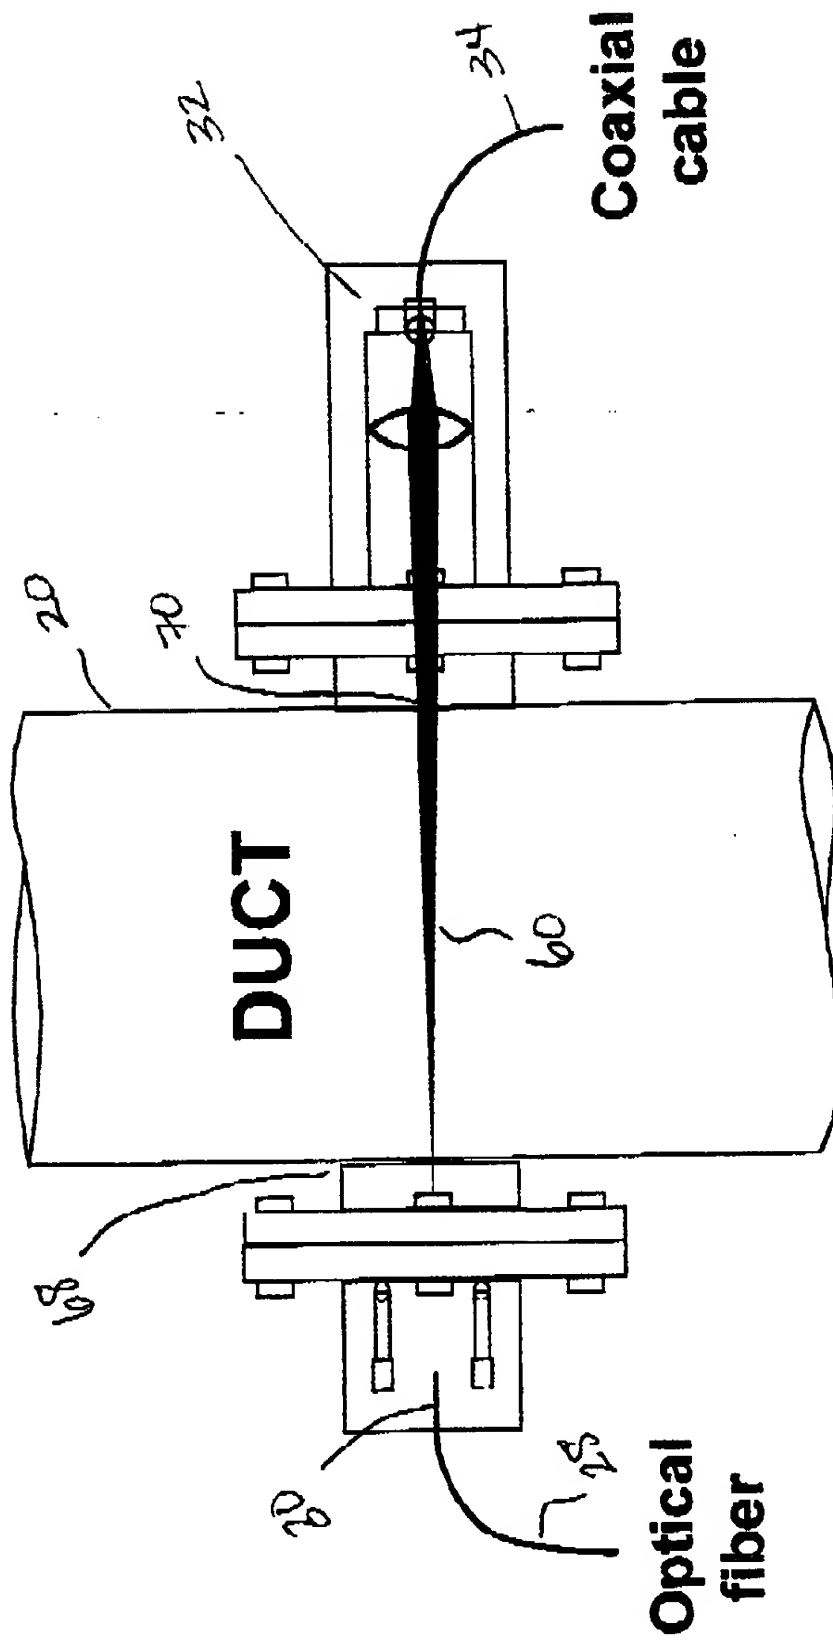


FIGURE 16

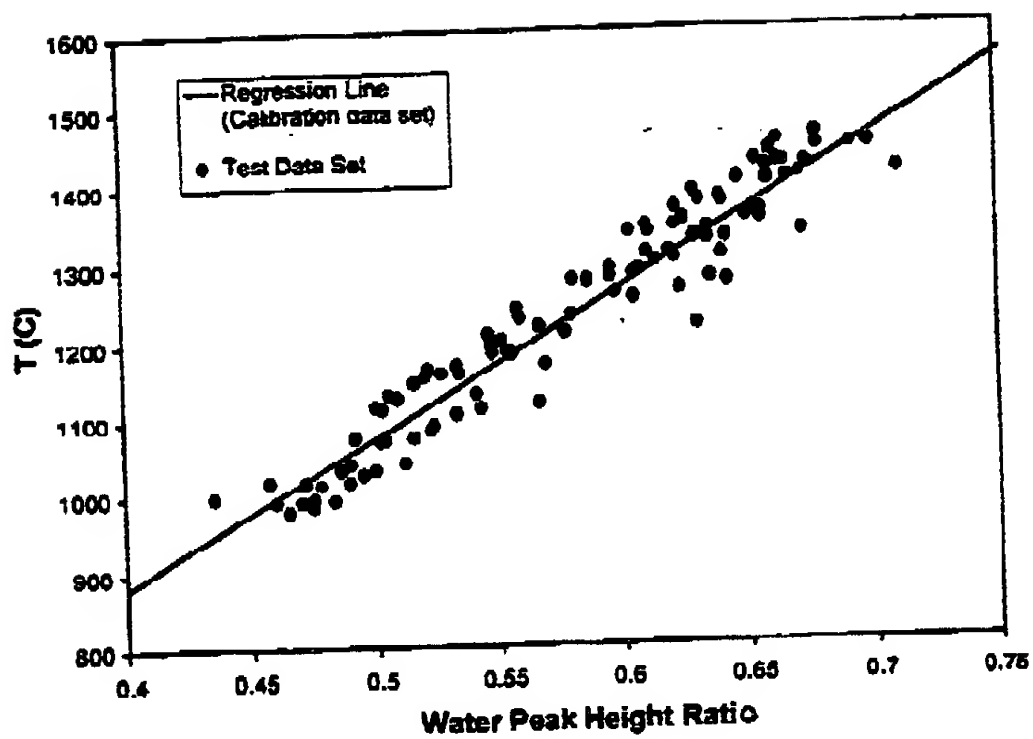


FIGURE 17

T09290" 9T98860

FO9290" ST 988860

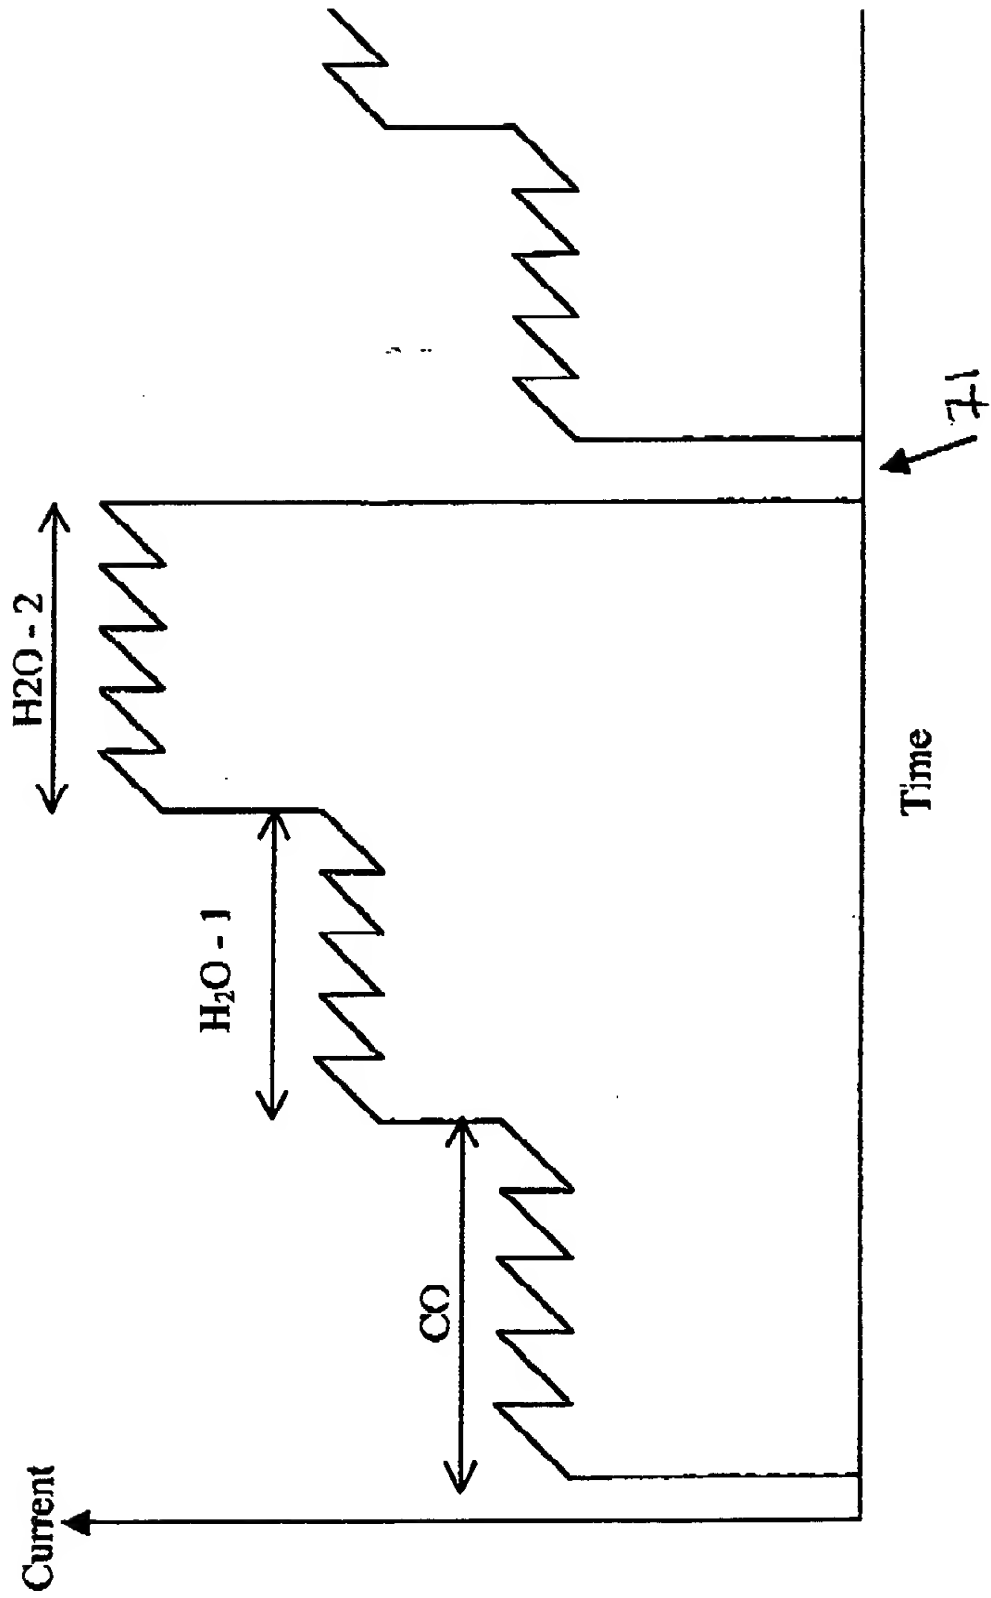


FIGURE 18

T09290-9T98860

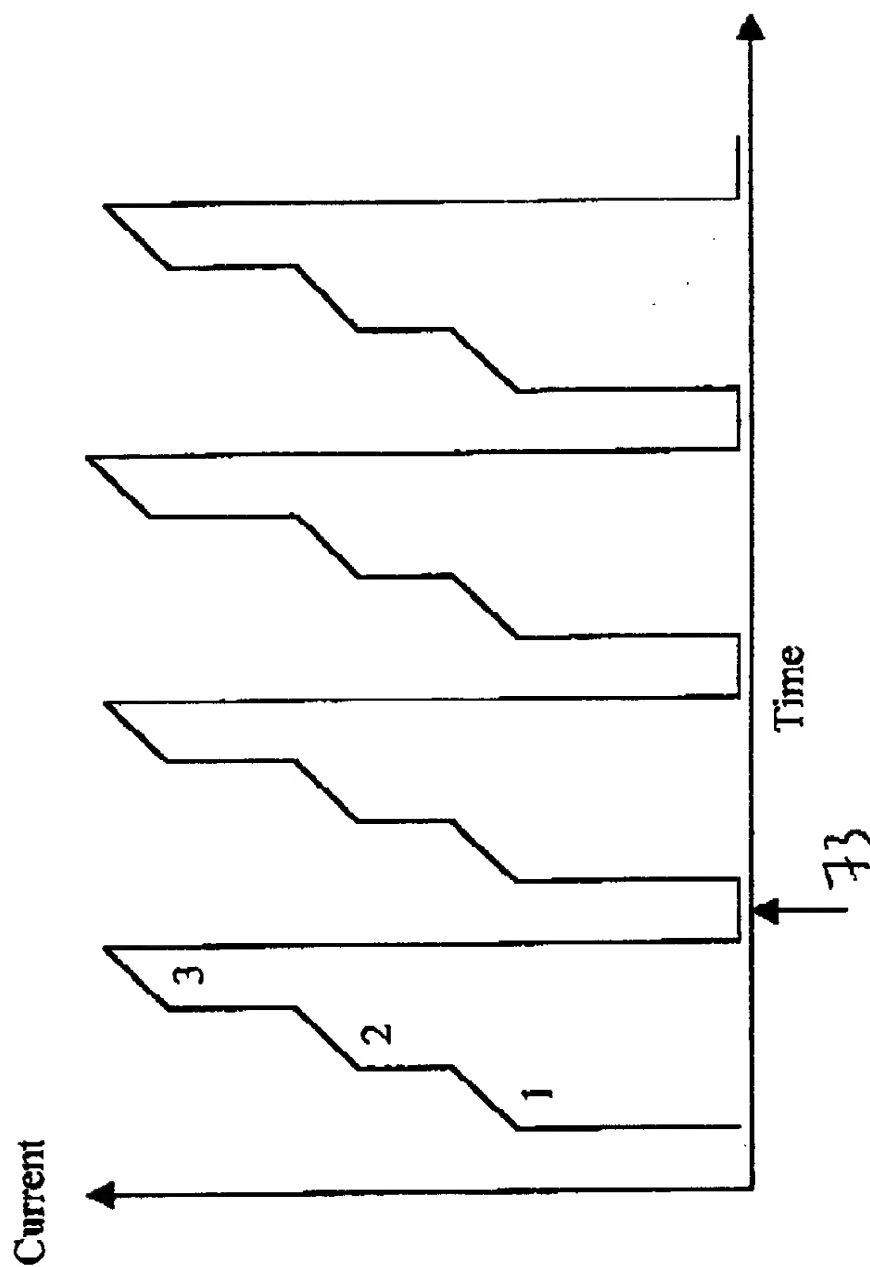


FIGURE 19